


FOR YOUR SAFETY

Everything
you need
for your safety



FOOTWEAR

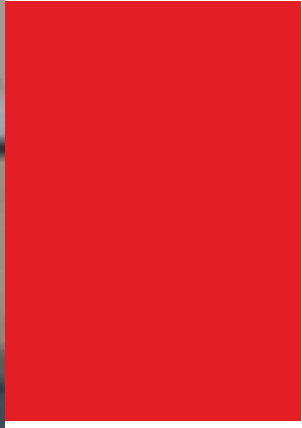

 Designed for you:

Different models for all uses. They adapt to your feet and your needs.

 More comfortable:

Padded inside, comfortable and flexible. You won't even realise you are wearing them.

 Non-slip:

With the non-slip SRC/SRA sole you get extra safety and strength. Stomp your feet and obtain your goals.

CHARACTERISTICS

- Work safely with our professional footwear.
- Non-slip boots and shoes, water, oil and fuel resistant, with a reinforced toe cap, anti-perforation insole... Make sure your feet are safe with Bellota.

USES

Different models for all uses:

- For warehouses
- For transport
- For industry
- For construction
- For agriculture

IDENTIFY SAFETY FOOTWEAR

SB	Footwear with 200 J resistant toe cap
A	Anti-static safety footwear
E	Energy absorption in the heel
F0	Oil and hydrocarbons resistance
P	Perforation resistance no less than 1100N.
WRU	Water penetration and absorption resistance.
WR	Waterproof footwear.
HRO	Heat resistant sole for protection when walking on hot surfaces.
HI	Sole with heat insulation for protection when walking on hot surfaces.
CI	Sole with cold insulation for protection when walking on cold surfaces
SRA	Maximum slip resistance on tiled floors with lubricant: water with detergent.
SRC	Maximum slip resistance (tiled floor with lubricant: water with detergent and stainless steel floor with lubricant: glycerine).
ESD	It discharges the static electricity that accumulates in the body into the ground to prevent any damage to electronic devices (UNE EN 61340-5-1:2016).
SIP	SB + A + E + FO + closed heel area + P
S3	SIP + WRU + cleated outsole
S5	SB + A + E + FO + P + cleated outsole

OUR FOOTWEAR

RANGE	REF.	SAFETY CATEGORY	TOE CAP	ANTI-PERFORATION INSOLE
CLASSIC	7230S51P	S1P (SB A E FO P) SRC	Metallic	Metallic
	72304S1P	S1P (SB A E FO P) SRC	Metallic	Metallic
	72306S1P	S1P (SB A E FO P) SRC	Metallic	Metallic
	72301S3	S3 (SB A E FO P WRU) SRC	Metallic	Metallic
	72300S3	S3 (SB A E FO P WRU) SRC	Metallic	Metallic
	72302S3	S3 (SB A E FO P WRU) SRC	Metallic	Metallic
	72303S3	S3 (SB A E FO P WRU) SRC	Metallic	Metallic
	72301LNTS3	S3 (SB A E FO P WRU) HRO HI CI SRC	Metallic	Metallic
	72300LNTS3	S3 (SB A E FO P WRU) HRO HI CI SRC	Metallic	Metallic
	72310S1P	S1P (SB A E FO P) SRC	Fiber glass	Fabric
COMP+	72312S1P	S1P (SB A E FO P) SRC	Fiber glass	Fabric
	72309S1P	S1P (SB A E FO P) SRC	Fiber glass	Fabric
	72310NTS1P	S1P (SB A E FO P) HRO HI CI SRC	Fiber glass	Fabric
	72309NTS1P	S1P (SB A E FO P) HRO HI CI SRC	Fiber glass	Fabric
	72308S3	S3 (SB A E FO P WRU) SRC	Fiber glass	Fabric
	72307S3	S3 (SB A E FO P WRU) SRC	Fiber glass	Fabric
	72311S3	S3 (SB A E FO P WRU) SRC	Fiber glass	Fabric
	72226S1P	S1P (SB A E FO P) SRC	Fiber glass	Fabric
	72227S1P	S1P (SB A E FO P) SRC	Fiber glass	Fabric
	72221S1P	S1P (SB A E FO P) SRC	Fiber glass	Fabric
NON METAL	72208BS3	S3 (SB A E FO P WRU) SRC	Fiber glass	Fabric
	72208GS3	S3 (SB A E FO P WRU) SRC	Fiber glass	Fabric
	72213S3	S3 (SB A E FO P WRU) SRC	Fiber glass	Fabric
CLICK	72211NS1P	S1P (SB A E FO P) HI CI HRO SRA	Fabric	Fabric
	72212GS3	S3 (SB A E FO P WRU) HI CI HRO SRA	Fiber glass	Fabric
	72219GS3	S3 (SB A E FO P WRU) HI CI HRO SRA	Fiber glass	Fabric
AGRO	FTW01B02	02 (0B A E WRU) WR SRA	-	-
	FTW01BS3	NEW S3 (SB A E FO P WRU) WR SRA	Fiber glass	Fabric
	FTW02BS1P	S1P (SB A E FO P) SRC	Fiber glass	Fabric
FLEX	FTW04GS1P	S1P (SB A E FO P) SRC ESD	Fiber glass	Fabric
	FTW05B0S1P	S1P (SB A E FO P) SRC ESD	Fiber glass	Fabric
	FTW05BYS1P	S1P (SB A E FO P) SRC ESD	Fiber glass	Fabric
	FTW03BS3	S3 (SB A E FO P WRU) SRC ESD	Fiber glass	Fabric
	FTW07BS3	NEW S3 (SB A E FO P WRU) SRC ESD	Fiber glass	Fabric
STREET	72350BBS1P	S1P (SB A E FO P) HRO CI SRC	Aluminio	Fabric
	72350BRS1P	S1P (SB A E FO P) HRO CI SRC	Aluminio	Fabric
INDUSTRY	72351BS1P	S1P (SB A E FO P) HRO CI SRC	Aluminio	Fabric
	72352BS1P	S1P (SB A E FO P) HRO CI SRC	Aluminio	Fabric
	72224KBS1P	S1P (SB A E FO P) SRC	Aluminium	Fabric
RUNNING	72224NBS1P	S1P (SB A E FO P) SRC	Aluminium	Fabric
	72223BS3	S3 (SB A E FO P WRU) SRC	Aluminium	Fabric
	72223NBS3	S3 (SB A E FO P WR) SRC	Aluminium	Fabric
	72242S5	S5 (SB A E FO P WR) SRA	Metallic	Metallic
WATER	72243S5	S5 (SB A E FO P WR) SRA	Metallic	Metallic
	72241B	0B SRA	-	-
CORE	FTW3050S1P	NEW S1P (SB A E FO P) SRC	Steel	Fabric
	FTW4091S1P	NEW S1P (SB A E FO P) SRC	Fiber glass	Fabric
VOLTA	FTW4051S3	NEW S1P (SB A E FO P WRU) SRC	Fiber glass	Fabric
	FTW5074S3	NEW S1P (SB A E FO P WRU) SRC	Fiber glass	Fabric

CLASSIC RANGE

- Category II certified footwear according to the UNE EN ISO 20345:11 standard.
- Metallic security toe cap and antiperforation insole.
- Outsole:**
- SRC dual density PU + PU: maximum anti-slip performance certifiable according to current standards.
- Sole design that provides security and resistance: wide channels, braking zones, shock absorption, shank textured and high toe and rear profiles.

Nitrile soles:

- Stitched nitrile sole for the most extreme conditions without losing comfort: resistant to hot contact (HRO), floor heat insulating (HI), floor cold insulating (CI) and SRC maximum anti-slip performance certifiable according to current standards.
- Sole design for safety and durability: wide grooves, braking zones, shock absorption and textured shank and raised toe and rear profiles.

Upper:

- Leather: two different finishes.
- Stained: some resistance to moisture.
- More breathable and lightweight.
- Cushioned collar, EXTRA cushioned bellows tongue and ergonomically shaped inner insole for greater comfort and fit.
- Padded lining Bellota Mesh: better breathability and more comfort.
- Wide shape.
- **Uses:**
- For general use in jobs that need safety shoes. Functionality.

Uses of nitrile products:

- For use under the most extreme conditions requiring safety footwear. Functionality.
- For general use where heavy-duty safety footwear is required.
- Storage, transport, industry and construction.



REF.	€	INFORMATION	Box	Box
72300-36 S3	31,09	640342	1	10
72300-37 S3	31,09	640366	1	10
72300-38 S3	31,09	640380	1	10
72300-39 S3	31,09	640403	1	10
72300-40 S3	31,09	640427	1	10
72300-41 S3	31,09	640441	1	10
72300-42 S3	31,09	640465	1	10
72300-43 S3	31,09	640489	1	10
72300-44 S3	31,09	640502	1	10
72300-45 S3	31,09	640526	1	10
72300-46 S3	31,09	640823	1	10
72300-47 S3	31,09	640540	1	10
72300-48 S3	31,09	640564	1	10

S3 (SB A E F O P WRU) SRC.

▶ LEATHER BOOT S3 72300

REF.	€	INFORMATION	Box	Box
72301-36 S3	30,11	640588	1	10
72301-37 S3	30,11	640601	1	10
72301-38 S3	30,11	640847	1	10
72301-39 S3	30,11	640625	1	10
72301-40 S3	30,11	640649	1	10
72301-41 S3	30,11	640663	1	10
72301-42 S3	30,11	640687	1	10
72301-43 S3	30,11	640748	1	10
72301-44 S3	30,11	640700	1	10
72301-45 S3	30,11	640724	1	10
72301-46 S3	30,11	640762	1	10
72301-47 S3	30,11	640786	1	10
72301-48 S3	30,11	640809	1	10

S3 (SB A E F O P WRU) SRC.

▶ LEATHER SHOE S3 72301

REF.	€	INFORMATION	Box	Box
72304-36 S3	32,11	642544	1	10
72304-37 S3	32,11	642568	1	10
72304-38 S3	32,11	642582	1	10
72304-39 S3	32,11	642605	1	10
72304-40 S3	32,11	642629	1	10
72304-41 S3	32,11	643268	1	10
72304-42 S3	32,11	642643	1	10
72304-43 S3	32,11	642667	1	10
72304-44 S3	32,11	642681	1	10
72304-45 S3	32,11	642704	1	10
72304-46 S3	32,11	642728	1	10
72304-47 S3	32,11	642742	1	10

S3 (SB A E F O P WRU) SRC.



▶ WELDING LEATHER BOOT S3-72302

REF.	€	INFORMATION	Box	Box
72302-36 S3	35,38	154054	1	10
72302-37 S3	35,38	376210	1	10
72302-38 S3	35,38	642148	1	10
72302-39 S3	35,38	642162	1	10
72302-40 S3	35,38	642186	1	10
72302-41 S3	35,38	642209	1	10
72302-42 S3	35,38	642223	1	10
72302-43 S3	35,38	642247	1	10
72302-44 S3	35,38	642261	1	10
72302-45 S3	35,38	642285	1	10
72302-46 S3	35,38	642308	1	10
72302-47 S3	35,38	642322	1	10

S3 (SB A E F O P WRU) SRC.

▶ REINFORCED LEATHER BOOT S3-72303

REF.	€	INFORMATION	Box	Box
72303-36 S3	34,75	642346	1	10
72303-37 S3	34,75	642360	1	10
72303-38 S3	34,75	643220	1	10
72303-39 S3	34,75	642384	1	10
72303-40 S3	34,75	642407	1	10
72303-41 S3	34,75	642421	1	10
72303-42 S3	34,75	643244	1	10
72303-43 S3	34,75	642445	1	10
72303-44 S3	34,75	642469	1	10
72303-45 S3	34,75	642483	1	10
72303-46 S3	34,75	642506	1	10
72303-47 S3	34,75	642520	1	10

S3 (SB A E F O P WRU) SRC.

▶ SUDE LEATHER BOOT S3P-72304

REF.	€	INFORMATION	Box	Box
72305-36 S3P	30,61	642766	1	10
72305-37 S3P	30,61	642780	1	10
72305-38 S3P	30,61	642803	1	10
72305-39 S3P	30,61	642827	1	10
72305-40 S3P	30,61	642841	1	10
72305-41 S3P	30,61	642865	1	10
72305-42 S3P	30,61	642889	1	10
72305-43 S3P	30,61	642902	1	10
72305-44 S3P	30,61	642926	1	10
72305-45 S3P	30,61	643282	1	10
72305-46 S3P	30,61	642940	1	10
72305-47 S3P	30,61	642964	1	10

S3P (SB A E F O P) SRC.

▶ SUDE LEATHER SHOE S3P-72305

REF.	€	INFORMATION	Box	Box
72305-36 S3P	30,61	642766	1	10
72305-37 S3P	30,61	642780	1	10
72305-38 S3P	30,61	642803	1	10
72305-39 S3P	30,61	642827	1	10
72305-40 S3P	30,61	642841	1	10
72305-41 S3P	30,61	642865	1	10
72305-42 S3P	30,61	642889	1	10
72305-43 S3P	30,61	642902	1	10
72305-44 S3P	30,61	642926	1	10
72305-45 S3P	30,61	643282	1	10
72305-46 S3P	30,61	642940	1	10
72305-47 S3P	30,61	642964	1	10

S3P (SB A E F O P) SRC.



SIDE LEATHER-CANVAS BOOT S1P-72306					
REF.	€	MINIMUM P 11 2025	MAXIMUM P 11 2025	SRG	PROX
72306-36 S1P	32,87	642988	1	10	36
72306-37 S1P	32,87	643008	1	10	37
72306-38 S1P	32,87	643022	1	10	38
72306-39 S1P	32,87	643046	1	10	39
72306-40 S1P	32,87	643060	1	10	40
72306-41 S1P	32,87	643084	1	10	41
72306-42 S1P	32,87	643107	1	10	42
72306-43 S1P	32,87	643121	1	10	43
72306-44 S1P	32,87	643145	1	10	44
72306-45 S1P	32,87	643169	1	10	45
72306-46 S1P	32,87	643183	1	10	46
72306-47 S1P	32,87	643206	1	10	47

S1P (SBA E F O P) SRC.

SS (SBA E F O P WRU) HRO HI CI SRC.



NITRILE SHOE SS-72301					
REF.	€	MINIMUM P 11 2025	MAXIMUM P 11 2025	SRG	PROX
72301LNT-38 S3	33,70	682755	1	10	38
72301LNT-39 S3	33,70	682830	1	10	39
72301LNT-40 S3	33,70	682915	1	10	40
72301LNT-41 S3	33,70	682991	1	10	41
72301LNT-42 S3	33,70	683028	1	10	42
72301LNT-43 S3	33,70	683042	1	10	43
72301LNT-44 S3	33,70	683073	1	10	44
72301LNT-45 S3	33,70	683097	1	10	45
72301LNT-46 S3	33,70	683127	1	10	46
72301LNT-47 S3	33,70	683172	1	10	47

SS (SBA E F O P WRU) HRO HI CI SRC.

COMP+ RANGE

- Footwear certified as Category II according to EN ISO 20345:11.
- Non-metallic safety toe cap and antipenetration inner sole.

Sole:

- Bi-density PU + PU SRC: maximum anti-slip performance certifiable according to current standards.
- Sole design for safety and durability: wide grooves, braking zones, shock absorption and textured shank and raised toe and rear profiles.
- Footwear certified as Category II according to EN ISO 20345:11.

Nitrile soles:

- Stitched nitrile sole for the most extreme conditions without losing comfort: resistant to hot contact (HRO), floor heat insulating (HI), floor cold insulating (CI) and SRC maximum anti-slip performance certifiable according to current standards.
- Sole design for safety and durability: wide grooves, braking zones, shock absorption and textured shank and raised toe and rear profiles.

Style:

- S1P versions in suede leather: more breathable and lighter.
- S3 versions in waterproof, moisture-resistant leather.
- Elements with reflective properties for extra safety.
- Padded collar, gusseted tongue.
- Bellota Mesh padded lining: better ventilation and extra comfort.
- Wild Shape.

Uses:

- For general use where safety footwear is required. Flexible and lightweight 100% non-metal.
- Storage, transport, industry and construction.

Uses of nitrile products:

- For use under the most extreme conditions requiring safety footwear. Functionality.
- For general use where heavy-duty safety footwear is required.
- Storage, transport, industry and construction.

LEATHER BOOT NON METAL S3-72307

REF.	€	MINIMUM P 11 2025	MAXIMUM P 11 2025	SRG	PROX
72307-38 S3	39,97	645835	1	10	38
72307-39 S3	39,97	645859	1	10	39
72307-40 S3	39,97	645873	1	10	40
72307-41 S3	39,97	645897	1	10	41
72307-42 S3	39,97	645910	1	10	42
72307-43 S3	39,97	645934	1	10	43
72307-44 S3	39,97	645958	1	10	44
72307-45 S3	39,97	645972	1	10	45
72307-46 S3	39,97	645996	1	10	46
72307-47 S3	39,97	646016	1	10	47

S3 (SBA E F O P WRU) SRC.

LEATHER SHOE NON METAL S3-72308

REF.	€	MINIMUM P 11 2025	MAXIMUM P 11 2025	SRG	PROX
72308-38 S3	38,83	646030	1	10	38
72308-39 S3	38,83	646054	1	10	39
72308-40 S3	38,83	646078	1	10	40
72308-41 S3	38,83	646092	1	10	41
72308-42 S3	38,83	646115	1	10	42
72308-43 S3	38,83	646139	1	10	43
72308-44 S3	38,83	646153	1	10	44
72308-45 S3	38,83	646177	1	10	45
72308-46 S3	38,83	646191	1	10	46
72308-47 S3	38,83	646214	1	10	47

S3 (SBA E F O P WRU) SRC.



REF.	€	MINIMUM P 11 2020	EN 11301	PG	PG	PG
72311-38 S3	42,69	675511	1	5	38	
72311-39 S3	42,69	675597	1	5	39	
72311-40 S3	42,69	675672	1	5	40	
72311-41 S3	42,69	675757	1	5	41	
72311-42 S3	42,69	675832	1	5	42	
72311-43 S3	42,69	675900	1	5	43	
72311-44 S3	42,69	675965	1	5	44	
72311-45 S3	42,69	675993	1	5	45	
72311-46 S3	42,69	676068	1	5	46	
72311-47 S3	42,69	676105	1	5	47	

S3 (SB A E F O P WRU) SRC.



REF.	€	MINIMUM P 11 2020	EN 11301	PG	PG	PG
72310-38 S1P	39,20	646436	1	10	38	
72310-39 S1P	39,20	646450	1	10	39	
72310-40 S1P	39,20	646474	1	10	40	
72310-41 S1P	39,20	646498	1	10	41	
72310-42 S1P	39,20	646511	1	10	42	
72310-43 S1P	39,20	646535	1	10	43	
72310-44 S1P	39,20	646559	1	10	44	
72310-45 S1P	39,20	646573	1	10	45	
72310-46 S1P	39,20	646597	1	10	46	
72310-47 S1P	39,20	646610	1	10	47	

S1P (SB A E F O P) SRC.



REF.	€	MINIMUM P 11 2020	EN 11301	PG	PG	PG
72309NT-38 S1P	46,85	683257	1	10	38	
72309NT-39 S1P	46,85	683332	1	10	39	
72309NT-40 S1P	46,85	683363	1	10	40	
72309NT-41 S1P	46,85	683394	1	10	41	
72309NT-42 S1P	46,85	683417	1	10	42	
72309NT-43 S1P	46,85	683448	1	10	43	
72309NT-44 S1P	46,85	683479	1	10	44	
72309NT-45 S1P	46,85	683493	1	10	45	
72309NT-46 S1P	46,85	683554	1	10	46	
72309NT-47 S1P	46,85	683578	1	10	47	

S1P (SB A E F O P) HRO HICI SRC.

REF.	€	MINIMUM P 11 2020	EN 11301	PG	PG	PG
72309-38 S1P	40,33	646238	1	10	38	
72309-39 S1P	40,33	646252	1	10	39	
72309-40 S1P	40,33	646276	1	10	40	
72309-41 S1P	40,33	646290	1	10	41	
72309-42 S1P	40,33	646337	1	10	42	
72309-43 S1P	40,33	646313	1	10	43	
72309-44 S1P	40,33	646351	1	10	44	
72309-45 S1P	40,33	646375	1	10	45	
72309-46 S1P	40,33	646399	1	10	46	
72309-47 S1P	40,33	646412	1	10	47	

S1P (SB A E F O P) SRC.



REF.	€	MINIMUM P 11 2020	EN 11301	PG	PG	PG
72312-38 S1P	39,18	687224	1	10	38	
72312-39 S1P	39,18	687248	1	10	39	
72312-40 S1P	39,18	687262	1	10	40	
72312-41 S1P	39,18	687286	1	10	41	
72312-42 S1P	39,18	687309	1	10	42	
72312-43 S1P	39,18	687323	1	10	43	
72312-44 S1P	39,18	687347	1	10	44	
72312-45 S1P	39,18	687361	1	10	45	
72312-46 S1P	39,18	687385	1	10	46	
72312-47 S1P	39,18	687408	1	10	47	

S1P (SB A E F O P) SRC.



REF.	€	MINIMUM P 11 2020	EN 11301	PG	PG	PG
72310NT-38 S1P	46,28	683608	1	10	38	
72310NT-39 S1P	46,28	683639	1	10	39	
72310NT-40 S1P	46,28	683653	1	10	40	
72310NT-41 S1P	46,28	683714	1	10	41	
72310NT-42 S1P	46,28	683738	1	10	42	
72310NT-43 S1P	46,28	683769	1	10	43	
72310NT-44 S1P	46,28	683813	1	10	44	
72310NT-45 S1P	46,28	683875	1	10	45	
72310NT-46 S1P	46,28	683899	1	10	46	
72310NT-47 S1P	46,28	683929	1	10	47	

S1P (SB A E F O P) HRO HICI SRC.

NONMETAL RANGE

- Category II certified footwear according to the UNE EN ISO 20345:11 standard.
- Non-metallic security toecap and antiperforation insole.

Outsole:

- SRC dual density PU + PU: maximum anti-slip performance certifiable according to current standards.
- Sole design that provides security and EXTRA resistance: wide channels, braking zones, shock absorption.

Upper:

- Leather: three different finishes:
 - AIR/EASY: more breathable and lightweight.
 - LIGHT: resistant to water penetration and absorption.
- TPU Piece in the ankle area for added protection and better fit.
- EXTRA cushioned collar, EXTRA cushioned bellows tongue and ergonomically shaped inner insole for greater comfort and fit.
- Extra padded lining Bellota Mesh 3D: maximum breathability and comfort.
- Extra-wide shape.
- No metal brackets: footwear 100% nonmetallic.

Uses:

- For general use in jobs that need safety shoes. Flexibility and lightness. 100% Non metal.



▶ LIGHT BEGE BOOT S3-72208

REF.	€	MINIMUM P 11 2020	EN 11301	PG	PG	PG
72208B-38 S3	66,04	581362	1	5	38	
72208B-39 S3	66,04	581386	1	5	39	
72208B-40 S3	66,04	581409	1	5	40	
72208B-41 S3	66,04	581423	1	5	41	
72208B-42 S3	66,04	581447	1	5	42	
72208B-43 S3	66,04	581461	1	5	43	
72208B-44 S3	66,04	581485	1	5	44	
72208B-45 S3	66,04	581508	1	5	45	
72208B-46 S3	66,04	581522	1	5	46	
72208B-47 S3	66,04	581546	1	5	47	

S3 (SB A E F O P WRU) SRC.

▶ LIGHT GREY BOOT S3-72208

REF.	€	MINIMUM P 11 2020	EN 11301	PG	PG	PG
72208G-38 S3	66,04	581164	1	5	38	
72208G-39 S3	66,04	581188	1	5	39	
72208G-40 S3	66,04	581201	1	5	40	
72208G-41 S3	66,04	581225	1	5	41	
72208G-42 S3	66,04	581249	1	5	42	
72208G-43 S3	66,04	581263	1	5	43	
72208G-44 S3	66,04	581287	1	5	44	
72208G-45 S3	66,04	581300	1	5	45	
72208G-46 S3	66,04	581324	1	5	46	
72208G-47 S3	66,04	581348	1	5	47	

S3 (SB A E F O P WRU) SRC.

TRAIL RANGE

- Category II certified footwear according to the UNE EN ISO 20345:11 standard.
 - Non-metallic security toecap and antiperforation insole.
- Outsole:**
- Double density Rubber + EVA: Rubber provides special features such as antislip resistance, resistance to hydrocarbons and to high temperatures. EVA for greater lightness and cushioning.
 - Sole design that provides security and resistance: wide channels, braking zones, shock absorption.
 - TPU insert in the shank to prevent twisting of the foot and provide stability to the tread.
- Upper:**
- Two product lines:
 - Microfiber and Mesh: maximum breathability.
 - Hydrofugated microfiber (S3): resistant to water absorption and penetration.
 - TPU insert in the shank to prevent twisting of the foot and provide better adjustment.
 - EX TRA cushioned collar, EX TRA cushioned bellows tongue and ergonomically shaped inner insole for greater comfort and fit.
 - Extra padded lining Bellota Mesh 3D: maximum breathability and comfort.
 - Wide shape.
 - Anti-abrasion insole for greater resistance to knocks and scratches.
- Uses:**
- For general use in jobs that need safety shoes. Technology and Design.
 - Especially suitable for OUTDOOR use.

REF.	€	MINIMUM P 11 2025	€	MINIMUM P 11 2025	PRINTE P 11 2025	PRINTE
► TRAIL GREY SHOE S3-7272						
72212G-38 S3	79,00	610826	1	5	38	
72212G-39 S3	79,00	610840	1	5	39	
72212G-40 S3	79,00	610864	1	5	40	
72212G-41 S3	79,00	610888	1	5	41	
72212G-42 S3	79,00	610901	1	5	42	
72212G-43 S3	79,00	610925	1	5	43	
72212G-44 S3	79,00	610949	1	5	44	
72212G-45 S3	79,00	610963	1	5	45	
72212G-46 S3	79,00	610987	1	5	46	
72212G-47 S3	79,00	611007	1	5	47	

S3 (SB A E F O P WRU) HI CI HRO SRA.



S3 (SB A E F O P WRU) HI CI HRO SRA.



REF.	€	MINIMUM P 11 2025	€	MINIMUM P 11 2025	PRINTE P 11 2025	PRINTE
► TRAIL BLACK SHOE S1P-7271						
72211N-38 S1P	74,43	610642	1	5	38	
72211N-39 S1P	74,43	610666	1	5	39	
72211N-40 S1P	74,43	610680	1	5	40	
72211N-41 S1P	74,43	610703	1	5	41	
72211N-42 S1P	74,43	610727	1	5	42	
72211N-43 S1P	74,43	610741	1	5	43	
72211N-44 S1P	74,43	610765	1	5	44	
72211N-45 S1P	74,43	610789	1	5	45	
72211N-46 S1P	74,43	610802	1	5	46	
72211N-47 S1P	74,43	611250	1	5	47	

S1P (SB A E F O P) HI CI HRO SRA.

AGRO RANGE

- FTW01BS1P: Footwear certified in accordance with Regulation (EU) 42/5/2016. Shoe O2-WR.
 - FTW01BS3: Footwear certified as Category II according to EN ISO 20345:11. Shoe S3-WR.
 - Work footwear with waterproof fabric and sealed seams.
- Sole:**
- Bi-density Rubber + EVA: Rubber for increased thermal resistance, hydrocarbon resistance and slip resistance.
 - EVA for lightness and cushioning.
 - Sole design for safety and durability: wide grooves, braking zones, shock absorption and raised toe and rear profiles.
 - TPU insert in shank to prevent twisting of the foot and provide footstep stability.
- Style:**
- High quality CrazyHorse natural leather. Resistant and strong.
 - TPU ankle insert for extra protection and a better fit.
 - EXTRA padded collar, EXTRA padded gusseted tongue. Open cell foam insole for extra comfort and cushioning.
 - Antistatic stitching.
 - Bellota Mesh EX TRA padded lining 3D: better ventilation and extra comfort.
 - Wide shape.
 - Anti-abrasion toe cap for greater resistance to impacts and friction.
- Uses:**
- FTW01B02: For general use in jobs requiring non-safety occupational footwear (no safety toecap or insole).
 - Particularly suitable for outdoor work and humid environments: agriculture, gardening and rural areas, stockbreeding or mining.
 - FTW01BS3: For general use in jobs requiring safety occupational footwear (with safety toecap and insole).
 - Particularly suitable for outdoor work and humid environments: agriculture, gardening, stockbreeding or mining.



REF.	€	MINIMUM P 11 2025	€	MINIMUM P 11 2025	PRINTE P 11 2025	PRINTE
► AGRO BOOT O2 WR FTW01						
FTW01-38B02	77,18	673654	1	5	38	
FTW01-39B02	77,18	673678	1	5	39	
FTW01-40B02	77,18	673746	1	5	40	
FTW01-41B02	77,18	673760	1	5	41	
FTW01-42B02	77,18	673791	1	5	42	
FTW01-43B02	77,18	673814	1	5	43	
FTW01-44B02	77,18	673838	1	5	44	
FTW01-45B02	77,18	673869	1	5	45	
FTW01-46B02	77,18	673906	1	5	46	
FTW01-47B02	77,18	673920	1	5	47	

O2 (OBA E F O P WRU) WR SRA.

REF.	€	MINIMUM P 11 2025	€	MINIMUM P 11 2025	PRINTE P 11 2025	PRINTE
► OUTDOOR BOOT WR S3-FTW01						
FTW01-38B S3	87,37	691603	1	5	38	
FTW01-39B S3	87,37	691627	1	5	39	
FTW01-40B S3	87,37	691641	1	5	40	
FTW01-41B S3	87,37	691665	1	5	41	
FTW01-42B S3	87,37	691689	1	5	42	
FTW01-43B S3	87,37	691702	1	5	43	
FTW01-44B S3	87,37	691726	1	5	44	
FTW01-45B S3	87,37	691740	1	5	45	
FTW01-46B S3	87,37	691764	1	5	46	
FTW01-47B S3	87,37	691788	1	5	47	

S3 (SB A E F O P WRU) WR SRA.

S3 (SB A E F O P WRU) WR SRA.

FLEX RANGE

- Footwear certified as Category II according to EN ISO 20345:11. Safety shoe S1P or S3 depending on the model.
- Non-metallic safety fiberglass toe cap and antiperforation textile inner sole.
- Biomechanically tested shoes to respect the natural footprint and provide maximum comfort at work.
- ESD-certified models that divert the electrostatic discharge accumulated in the body towards the outside, preventing damage to electronic components.

Sole:

- Bi-density PU + PU SSRC: maximum anti-slip performance certifiable according to current standards.
- New sole providing safety and maximum comfort: braking zones, shock absorption, textured shank, maximum flexibility.

Style:

- Leather or Microfiber + Mesh (for strength, lightweight and breathability) depending on the model.
- EX-TPA padded lining, collar and gusseted tongue for greater comfort and better ventilation.
- CONFORT PLUS insole made from open-cell foam that provides greater comfort and relieves pressure. Antistatic stitching.
- Anti-abrasion toe cap and back area for greater resistance to impacts and friction.

Uses:

- For general use where safety footwear is required. Comfortable, breathable and lightweight.
- Particularly suitable for work in restocking, handling and industry.
- ESD-certified models, suitable for work in chemical companies, in the automotive industry or in the assembly of electronic components.

Shape:

- Men's size and shape FTW02, FTW03, FTW04 and FTW05.
- Women's size and shape F TW07.



► BEIGE FLEX SHOE S1P-FTW02

REF.	€	PRINTING 2 x 4 200px	Box	Box
FTW02-38B S1P	47,19	689563	1	5
FTW02-39B S1P	47,19	689587	1	5
FTW02-40B S1P	47,19	689600	1	5
FTW02-41B S1P	47,19	689624	1	5
FTW02-42B S1P	47,19	689648	1	5
FTW02-43B S1P	47,19	689662	1	5
FTW02-44B S1P	47,19	689686	1	5
FTW02-45B S1P	47,19	689709	1	5
FTW02-46B S1P	47,19	689723	1	5
FTW02-47B S1P	47,19	689747	1	5

S1P (SB A E FO P) SRC.

► BLACK FLEX SPORT SHOE S1P-FTW04

REF.	€	PRINTING 2 x 4 200px	Box	Box
FTW04-38G S1P	49,81	689969	1	5
FTW04-39G S1P	49,81	689983	1	5
FTW04-40G S1P	49,81	690002	1	5
FTW04-41G S1P	49,81	690026	1	5
FTW04-42G S1P	49,81	690040	1	5
FTW04-43G S1P	49,81	690064	1	5
FTW04-44G S1P	49,81	690088	1	5
FTW04-45G S1P	49,81	690101	1	5
FTW04-46G S1P	49,81	690125	1	5
FTW04-47G S1P	49,81	690149	1	5

S1P (SB A E FO P) SRC ESD.



► BLACK-ORANGE FLEX SHOE S1P-FTW05

REF.	€	PRINTING 2 x 4 200px	Box	Box
FTW05-38BO S1P	53,02	690163	1	5
FTW05-39BO S1P	53,02	690187	1	5
FTW05-40BO S1P	53,02	690200	1	5
FTW05-41BO S1P	53,02	690224	1	5
FTW05-42BO S1P	53,02	690248	1	5
FTW05-43BO S1P	53,02	690262	1	5
FTW05-44BO S1P	53,02	690286	1	5
FTW05-45BO S1P	53,02	690309	1	5
FTW05-46BO S1P	53,02	690323	1	5
FTW05-47BO S1P	53,02	690347	1	5

S1P (SB A E FO P) SRC ESD.

► BLUE-YELLOW FLEX SHOE S1P-FTW05

REF.	€	PRINTING 2 x 4 200px	Box	Box
FTW05-38BY S1P	53,02	690361	1	5
FTW05-39BY S1P	53,02	690385	1	5
FTW05-40BY S1P	53,02	690408	1	5
FTW05-41BY S1P	53,02	690422	1	5
FTW05-42BY S1P	53,02	690453	1	5
FTW05-43BY S1P	53,02	690477	1	5
FTW05-44BY S1P	53,02	690491	1	5
FTW05-45BY S1P	53,02	690514	1	5
FTW05-46BY S1P	53,02	690538	1	5
FTW05-47BY S1P	53,02	690552	1	5

S1P (SB A E FO P) SRC ESD.



► BLACK FLEX SHOE S3-FTW03

REF.	€	PRINTING 2 x 4 200px	Box	Box
FTW03-38B S3	51,95	689761	1	5
FTW03-39B S3	51,95	689785	1	5
FTW03-40B S3	51,95	689808	1	5
FTW03-41B S3	51,95	689822	1	5
FTW03-42B S3	51,95	689846	1	5
FTW03-43B S3	51,95	689860	1	5
FTW03-44B S3	51,95	689884	1	5
FTW03-45B S3	51,95	689907	1	5
FTW03-46B S3	51,95	689921	1	5
FTW03-47B S3	51,95	689945	1	5

S3 (SB A E FO P WRU) SRC ESD.

► BLACK FLEX FEMININE SHOE S3-FTW07

REF.	€	PRINTING 2 x 4 200px	Box	Box
FTW07-35 90 S3	51,95	702620	1	5
FTW07-36 90 S3	51,95	702644	1	5
FTW07-37 90 S3	51,95	702668	1	5
FTW07-38 90 S3	51,95	702682	1	5
FTW07-39 90 S3	51,95	702705	1	5
FTW07-40 90 S3	51,95	702729	1	5
FTW07-41 90 S3	51,95	702743	1	5
FTW07-42 90 S3	51,95	702767	1	5

S1P (SB A E FO P) SRC ESD.

NEW

STREET & INDUSTRY RANGE

- Footwear certified according to the (EU) Regulation 425/2016. Safety Shoe S1P.
- Aluminium safety toe cap and non-metal fabric anti-perforation insole.

Outsole:

- Bi-density: Rubber + EVA: Rubber HPO to increase the resistance to high temperatures and it has a high slip resistance coefficient SRC. EVA for lighter footwear with improved cushioning and shock absorption.
- Exclusive sole design to increase safety and oil and hydrocarbon resistance.

Upper:

- Microfibre+ Mesh: ultra breathable.
- Lining, cuff and bellows tongue, EXTRA padding for more comfort and better ventilation. CI high heat resistance inside.
- Insole made of open-cell foam that enhances comfort and cushioning. Anti-static stitching.
- Extra wide and non-magnetic aluminium toe cap. Much lighter.
- Anti-abrasion, anti-impact toe cap for high resistance against stubbing and rubbing.

Uses:

- For general use in jobs that require safety footwear. Comfortable, breathable and light.
- Especially recommended for restocking, handling, industrial work.



REF.	€	MINIMUM P.U. (2025)	Box	Box
72350BB-38 S1P	64,42	657722	1	5
72350BB-39 S1P	64,42	657746	1	5
72350BB-40 S1P	64,42	657760	1	5
72350BB-41 S1P	64,42	657784	1	5
72350BB-42 S1P	64,42	657807	1	5
72350BB-43 S1P	64,42	657821	1	5
72350BB-44 S1P	64,42	657845	1	5
72350BB-45 S1P	64,42	657869	1	5
72350BB-46 S1P	64,42	657883	1	5
72350BB-47 S1P	64,42	657906	1	5

S1P (SB A E F O P) HRO CI SRC.



REF.	€	MINIMUM P.U. (2025)	Box	Box
72351B-36 S1P	63,89	657678	1	5
72351B-37 S1P	63,89	657692	1	5
72351B-38 S1P	63,89	657722	1	5
72351B-39 S1P	63,89	657296	1	5
72351B-40 S1P	63,89	657319	1	5
72351B-41 S1P	63,89	657333	1	5
72351B-42 S1P	63,89	657357	1	5
72351B-43 S1P	63,89	657371	1	5
72351B-44 S1P	63,89	657395	1	5
72351B-45 S1P	63,89	657418	1	5
72351B-46 S1P	63,89	657432	1	5
72351B-47 S1P	63,89	657456	1	5

S1P (SB A E F O P) HRO CI SRC.



REF.	€	MINIMUM P.U. (2025)	Box	Box
72350BR-36 S1P	64,42	657920	1	5
72350BR-37 S1P	64,42	657944	1	5
72350BR-38 S1P	64,42	657968	1	5
72350BR-39 S1P	64,42	656831	1	5
72350BR-40 S1P	64,42	656855	1	5
72350BR-41 S1P	64,42	656879	1	5
72350BR-42 S1P	64,42	656893	1	5
72350BR-43 S1P	64,42	656916	1	5
72350BR-44 S1P	64,42	656930	1	5
72350BR-45 S1P	64,42	656954	1	5
72350BR-46 S1P	64,42	656978	1	5
72350BR-47 S1P	64,42	656992	1	5

S1P (SB A E F O P) HRO CI SRC.



REF.	€	MINIMUM P.U. (2025)	Box	Box
72352B-36 S1P	64,43	657470	1	5
72352B-39 S1P	64,43	657494	1	5
72352B-40 S1P	64,43	657517	1	5
72352B-41 S1P	64,43	657531	1	5
72352B-42 S1P	64,43	657555	1	5
72352B-43 S1P	64,43	657579	1	5
72352B-44 S1P	64,43	657593	1	5
72352B-45 S1P	64,43	657616	1	5
72352B-46 S1P	64,43	657630	1	5
72352B-47 S1P	64,43	657654	1	5

S1P (SB A E F O P) HRO CI SRC.



REF.	€	MINIMUM P.U. (2025)	Box	Box
72223B-38 S3	82,70	637076	1	5
72223B-39 S3	82,70	637090	1	5
72223B-40 S3	82,70	637113	1	5
72223B-41 S3	82,70	637137	1	5
72223B-42 S3	82,70	637151	1	5
72223B-43 S3	82,70	637158	1	5
72223B-44 S3	82,70	637175	1	5
72223B-45 S3	82,70	637199	1	5
72223B-46 S3	82,70	637212	1	5
72223B-47 S3	82,70	637236	1	5

S3 (SB A E F O P WRU) SRC.



REF.	€	MINIMUM P.U. (2025)	Box	Box
72224NB-38 S1P	70,97	654660	1	5
72224NB-39 S1P	70,97	654684	1	5
72224NB-40 S1P	70,97	654707	1	5
72224NB-41 S1P	70,97	654721	1	5
72224NB-42 S1P	70,97	654745	1	5
72224NB-43 S1P	70,97	654769	1	5
72224NB-44 S1P	70,97	654783	1	5
72224NB-45 S1P	70,97	654806	1	5
72224NB-46 S1P	70,97	654820	1	5
72224NB-47 S1P	70,97	654844	1	5

S1P (SB A E F O P) SRC.

RUNNING RANGE

- Category II certified footwear according to the UNE EN ISO 20345:11 standard.
- Non-metallic security toecap and antiperforation insole.

Outsole:

- Double density Rubber + EVA: Rubber provides special features such as antislip resistance SRC, resistance to hydroca bonds and to high temperatures. EVA for greater lightness and cushioning.
- Sole design that provides security and resistance: wide channels, braking zones, shock absorption.
- Combination of materials and latest technologies available for a very sporty and light sole.

Upper:

- Two product lines:
 - RUN MODEL: hydrofugated microfibre + printing, S3 resistant to water absorption and penetration.
 - CELL MODEL: hydrofugated microfibre, S3 resistant to water absorption and penetration.
- Cushioned collar, EXTRA cushioned bellows tongue and ergonomically shaped inner insole for greater comfort and fit.
- Extra padded lining Bellota Mesh 3D: maximum breathability and comfort.
- Wide shape.

Uses:

- For general use in jobs that need safety shoes. Technology and lightweight.



REF.	€	MINIMUM P.U. (2025)	Box	Box
72223NB-38 S3	80,92	654226	1	5
72223NB-39 S3	80,92	654240	1	5
72223NB-40 S3	80,92	654264	1	5
72223NB-41 S3	80,92	654288	1	5
72223NB-42 S3	80,92	654301	1	5
72223NB-43 S3	80,92	654325	1	5
72223NB-44 S3	80,92	654349	1	5
72223NB-45 S3	80,92	654363	1	5
72223NB-46 S3	80,92	654387	1	5
72223NB-47 S3	80,92	654400	1	5

S3 (SB A E F O P WRU) SRC.



REF.	€	MINIMUM P.U. (2025)	Box	Box
72224KB-36 S1P	71,54	654622	1	5
72224KB-37 S1P	71,54	654646	1	5
72224KB-38 S1P	71,54	654670	1	5
72224KB-39 S1P	71,54	654694	1	5
72224KB-40 S1P	71,54	654718	1	5
72224KB-41 S1P	71,54	654742	1	5
72224KB-42 S1P	71,54	654766	1	5
72224KB-43 S1P	71,54	654790	1	5
72224KB-44 S1P	71,54	654814	1	5
72224KB-45 S1P	71,54	654838	1	5
72224KB-46 S1P	71,54	654862	1	5
72224KB-47 S1P	71,54	654886	1	5

S1P (SB A E F O P) SRC.

WATER RANGE

- Category II certified footwear according to the UNE EN ISO 20345:11 standard.
- PVC outsole and upper.
- Extra reinforcement at insole and ankle.
- Grooved heel area for easier removal.

Uses:

- For general use in jobs that need safety water penetration resistant shoes.



► PVC GREEN BOOT S5-7242

REF.	€	antistatic	slip	injection	SRP	Box
72242-39 S5	25,59	531862	1	6	39	
72242-40 S5	25,59	531886	1	6	40	
72242-41 S5	25,59	531909	1	6	41	
72242-42 S5	25,59	531923	1	6	42	
72242-43 S5	25,59	531947	1	6	43	
72242-44 S5	25,59	531961	1	6	44	
72242-45 S5	25,59	531985	1	6	45	
72242-46 S5	25,59	532005	1	6	46	
72242-47 S5	25,59	532029	1	6	47	

S5 (SB A E F O P WR) SRA.



► PVC BLACK OB BOOT-7241

REF.	€	antistatic	slip	injection	SRP	Box
72241B-38 OB	14,03	696448	1	10	38	
72241B-39 OB	14,03	687040	1	10	39	
72241B-40 OB	14,03	687064	1	10	40	
72241B-41 OB	14,03	687088	1	10	41	
72241B-42 OB	14,03	687101	1	10	42	
72241B-43 OB	14,03	687125	1	10	43	
72241B-44 OB	14,03	687149	1	10	44	
72241B-45 OB	14,03	687163	1	10	45	
72241B-46 OB	14,03	687187	1	10	46	
72241B-47 OB	14,03	687200	1	10	47	

OB SRA.

CORE RANGE

- Footwear certified as Category II according to EN ISO 20345:11. Safety shoe S1P.
- Non-metallic safety steel toe cap and antiperforation textile inner sole.

Sole:

- Bi-density PU + PU SRC: maximum anti-slip performance certifiable according to current standards.
- Sporty sole design for maximum comfort.

Style:

- Lightweight, breathable suede leather with perforations on the sides.
- Padded lining, collar and gusseted tongue for greater comfort and better breathability.
- Anti-abrasion toe cap and back area for greater resistance to impacts and friction.

Uses:

- For general use where breathable and lightweight safety footwear is required.
- Particularly suitable for working in indoor or dry environments in the building industry.



NEW

► CORE SHOE S1P-FW3050

REF.	€	antistatic	slip	injection	SRP	Box
FW30-36 50 S1P	38,95	700930	1	5	36	
FW30-37 50 S1P	38,95	700954	1	5	37	
FW30-38 50 S1P	38,95	700978	1	5	38	
FW30-39 50 S1P	38,95	700992	1	5	39	
FW30-40 50 S1P	38,95	701012	1	5	40	
FW30-41 50 S1P	38,95	701036	1	5	41	
FW30-42 50 S1P	38,95	701050	1	5	42	
FW30-43 50 S1P	38,95	701074	1	5	43	
FW30-44 50 S1P	38,95	701098	1	5	44	
FW30-45 50 S1P	38,95	701111	1	5	45	
FW30-46 50 S1P	38,95	701135	1	5	46	
FW30-47 50 S1P	38,95	701159	1	5	47	

S1P (SB A E F O P) SRC.

VOLTA RANGE

- Footwear certified as Category II according to EN ISO 20345:11. Safety shoe S1P and S3.
- Non-metallic safety fiberglass toe cap and antiperforation textile inner sole.

Sole:

- Bi-density PU + PU SRC: maximum anti-slip performance certifiable according to current standards.
- Sporty sole design for maximum comfort.

Style:

- S1P version: Nylon and microfibre combined for durability, lightweight and breathability.
- S3 version: Water and abrasion resistant Action Nobuck waterproof leather.
- Padded lining, collar and gusseted tongue for greater comfort and better breathability.
- Anti-abrasion back area for greater resistance to impacts and friction.

Uses:

- For general use where safety footwear is required. Comfortable, breathable and lightweight.
- For a wide range of sectors and industries: assembly of electronic components.



NEW



NEW

REF.	€	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345
FTW40-36 91 S1P	45,95	701418	1	5	36				
FTW40-37 91 S1P	45,95	701432	1	5	37				
FTW40-38 91 S1P	45,95	701456	1	5	38				
FTW40-39 91 S1P	45,95	701470	1	5	39				
FTW40-40 91 S1P	45,95	701494	1	5	40				
FTW40-41 91 S1P	45,95	701517	1	5	41				
FTW40-42 91 S1P	45,95	701531	1	5	42				
FTW40-43 91 S1P	45,95	701555	1	5	43				
FTW40-44 91 S1P	45,95	701579	1	5	44				
FTW40-45 91 S1P	45,95	701593	1	5	45				
FTW40-46 91 S1P	45,95	701616	1	5	46				
FTW40-47 91 S1P	45,95	701630	1	5	47				

S1P (SB A E FO P) SRC.

REF.	€	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345
FTW40-36 51 S3	49,95	701654	1	5	36				
FTW40-37 51 S3	49,95	701678	1	5	37				
FTW40-38 51 S3	49,95	701692	1	5	38				
FTW40-39 51 S3	49,95	701715	1	5	39				
FTW40-40 51 S3	49,95	701739	1	5	40				
FTW40-41 51 S3	49,95	701753	1	5	41				
FTW40-42 51 S3	49,95	701777	1	5	42				
FTW40-43 51 S3	49,95	701791	1	5	43				
FTW40-44 51 S3	49,95	701814	1	5	44				
FTW40-45 51 S3	49,95	701838	1	5	45				
FTW40-46 51 S3	49,95	701852	1	5	46				
FTW40-47 51 S3	49,95	701876	1	5	47				

S1P (SB A E FO P) SRC.

RACE RANGE

- Footwear certified as Category II according to EN ISO 20345:11. Safety shoe S3.
- Non-metallic safety fiberglass toe cap and antiperforation textile inner sole.

Sole:

- Bi-density PU + PU SRC: maximum anti-slip performance certifiable according to current standards.
- Modern and sporty sole design combining comfort and cushioning.

Style:

- Breathable mesh with inner waterproofing foil to combine water resistance and feet ventilation.
- Padded lining, collar and gusseted tongue for greater comfort and better ventilation.
- CONFORT PLUS insole made from open-cell foam that provides greater comfort and relieves pressure. Antistatic stitching.
- Anti-abrasion toe cap and back area for greater resistance to impacts and friction.
- Fiberglass toe cap, lighter.

Uses:

- For general use where safety footwear is required. Comfortable, breathable and lightweight.
- Particularly suitable for work in restocking, handling and industry.



NEW

REF.	€	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345	EN ISO 20345
FTW50-36 74 S3	54,95	701890	1	5	36				
FTW50-37 74 S3	54,95	701913	1	5	37				
FTW50-38 74 S3	54,95	701937	1	5	38				
FTW50-39 74 S3	54,95	701951	1	5	39				
FTW50-40 74 S3	54,95	701975	1	5	40				
FTW50-41 74 S3	54,95	701999	1	5	41				
FTW50-42 74 S3	54,95	702019	1	5	42				
FTW50-43 74 S3	54,95	702064	1	5	43				
FTW50-44 74 S3	54,95	702088	1	5	44				
FTW50-45 74 S3	54,95	702101	1	5	45				
FTW50-46 74 S3	54,95	702125	1	5	46				
FTW50-47 74 S3	54,95	702149	1	5	47				

S1P (SB A E FO P WRU) SRC.

LACES



REF.	€	mm	A mm
ACC2012090	1,99	708394	1.200

For handling heavy materials or large format tiles regardless of surface finish.



REF.	€	quantité	mm	A mm
ACC212090	199	708417	1	1.200

For handling heavy materials or large format tiles regardless of surface finish.



REF.	€	quantity 8 41 4209	A mm
ACC2012092	1,99	708400	1 1200

For handling heavy materials or large format tiles regardless of surface finish.



REF.	€	quantity	A mm
ACC2112070	1,99	708424	1 1.200

For handling heavy materials or large format tiles regardless of surface finish.

KNEE PADS



REF.	€	DESCRIPTION	Q.TA
72803	15,75	639193	6

Gel filled.



REF.	€	DESCRIPTION	UNIT
72805	20,89	PROFESSIONAL KNEE PAD 72805	6

Gel filled.



REF.	€	quantità	8.41.0299	
72804	25,93	639179	6	

Certificated Category I-EN 14404. Neoprene inner lining. Gel filled.